

VICTORIA STREET

CARRIAGEWAY TO BE RAISED TO 6mm BELOW FOOTWAY LEVEL.

No loading At any time

DIAG. No.2606

1 - SIGN TO BE REFRESHED AND INSTALLED ON NEW LIGHTING COLUMN

PROPOSED WATER POINT LOCATION TO BE CONFIRMED BY WCC.

No loading At any time

DIAG. No.2606

2 - SIGN TO BE REFRESHED AND INSTALLED ON NEW LIGHTING COLUMN

REMOVAL OF KERB BUILDOUT TO CREATE UNIFORMITY TO KERB ALIGNMENT

NEW GATE AND BOLLARDS TO BE INSTALLED AT MARKET EXIT

RENEWAL OF FOOTWAY SURFACE IN YORKSTONE PAVING

ELECTRIC CHARGING POINTS TO BE INSTALLED FOR MARKET BAYS

SIGNALISED PEDESTRIAN CROSSING TO REMAIN

SIGN TO BE INSTALLED ON EXISTING LIGHTING COLUMN TO ADVERTISE MARKET

PERMANENT TREE AND POWER SOCKET TO SUPPLY FESTIVE LIGHTS TO BE INSTALLED ON SITE



DIAG. No.616

3 - EXISTING INTERNALLY ILLUMINATED SIGN AND WIDE POST TO BE RETAINED



DIAG. No.616

4 - EXISTING INTERNALLY ILLUMINATED SIGN AND WIDE POST TO BE RETAINED




DIAG. No.606(B)



DIAG. No.613


5 - EXISTING SIGN TO BE REPLACED WITH A NEW INTERNALLY ILLUMINATED SIGN. EXISTING WIDE POST TO BE RETAINED



6 - SIGN TO BE REFRESHED AND INSTALLED ON NEW LIGHTING COLUMN




7 - SIGN TO BE REFRESHED AND INSTALLED ON NEW LIGHTING COLUMN

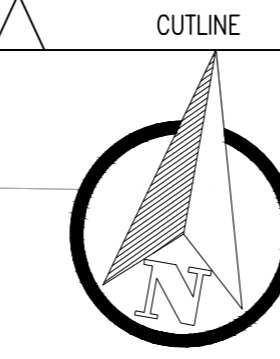

CUTLINE

RENEWAL OF CARRIAGEWAY SURFACE IN GRANITE SETTS



9 - EXISTING SIGN TO BE RETAINED ON LIGHTING COLUMN



DIAG. No.652

10 - NEW SIGN TO BE INSTALLED ON LIGHTING COLUMN

KEY

- EXISTING JUNCTION BOX
- EXISTING SERVICE COVER TO BE RELOCATED
- EXISTING CABINET / FEEDER PILLAR TO BE RETAINED IN ITS CURRENT LOCATION
- PROPOSED TREE WITH TREE PIT (RESIN BOUND AGGREGATE 6-10mm LAID ON 100mm OF 40mm FREE DRAINING CRUSHED STONE)
- EXISTING MARKET STALL NUMBER PLAQUES TO BE REINSTATED. NEW PLAQUES SHALL BE OBTAINED BY WCC TO REPLACE ANY EXISTING ONES THAT ARE TOO WORN OR MISSING
- PROPOSED NEW WATER POINT AND STANDING TAP TO SUPPLY STALL HOLDER. LOCATION TO BE CONFIRMED.

NOTES

- ALL EXISTING BASEMENT COVERAGE MATERIAL TO REMAIN AS EXISTING.
- ALL MARKET PITCH PLAQUES TO BE RETAINED AND KEPT ASIDE FOR REINSTALLATION.

KEY

- PROPOSED 300x200x75mm YORK STONE SETTS LAID ON 150mm C16/20 CONCRETE BASE AND 50mm SAND/CEMENT BED WHERE POSSIBLE.
- PROPOSED CARRIAGEWAY (TEMPLE) SETTS - 80% BLACK BASALT / 15% BLUE GREY GRANITE / 5% GREY PINK GRANITE (100 x RANDOM LENGTHS x 100mm) LAID ON 50mm SAND / CEMENT (3:1), 200mm C20/30 CONCRETE (xxm²)
- PROPOSED CARRIAGEWAY SURFACE COURSE 40mm, ON 60mm (MIN) BINDER COURSE ON SRC WET MIX C20 CONCRETE BASE NOMINAL 225mm THICKNESS
- EXISTING BASEMENT COVERING TO REMAIN AS EXISTING
- PROPOSED COLOURED SETTS (MARKET PLAQUES TO BE REINSTALLED, EXACT LOCATION TO BE AGREED)
- PROPOSED 400mmx400mmx63mm YORKSTONE TACTILE PAVING LAID ON 150mm C16/20 CONCRETE BASE WITH 50mm STEINTEC 'TUFFBED - 2 PACK' BEDDING MORTAR AND GROUT
- PROPOSED RAMP
- PROPOSED 300x200mm FLUSH GRANITE KERB WITH DROPPER LAID ON 150mm C16/20 WET LEAN CONCRETE WITH 6mm UPSTAND (MAX)
- PROPOSED 150x200mm GRANITE KERB ON 150mm C16/20 WET LEAN CONCRETE
- PROPOSED PRIMROSE YELLOW LINE MARKINGS
- PROPOSED WHITE LINE MARKING
- EXISTING SIGN AND POST
- PROPOSED SIGN AND POST
- PROPOSED WIDE BASE SIGN AND POST
- PROPOSED ELECTRIC SOCKET
- PROPOSED CANNON BOLLARD
- LAMP COLUMN TO BE REPLACED
- EXISTING LINE MARKING
- EXISTING WIDE BASED POST
- EXISTING TRAFFIC SIGNAL
- EXISTING GULLY
- PROPOSED CYCLE FRIENDLY GULLY
- EXISTING SERVICE COVER TO BE RECESSED
- EXISTING SERVICE COVER TO BE RAISED/LOWERED TO SUIT NEW LEVELS

INITIAL DESIGN



25 Mandala Way, London, SE1 5SZ
www.fconway.co.uk www.wsp.com



STRUTTON GROUND
PUBLIC REALM SCHEME

GENERAL ARRANGEMENT

SCALE @ A2 DATE 18.07.2017 DESIGN/DRAWN CEP CHECKED FC APPROVED DR SHEET A2

JOB No. 70035159 FMC PROJECT No. WWESA2024 BRIEF/DSB No. -

DRAWING No. 70035159-02-GA-01-01 REV. A

\\Ser01lon2uk.wspgroup.com\Projects\70035159_Strutton_Ground\02_WP\HW_Highways\01_Model\02-Initial_Design\70035159-02-GA-01.dwg 29 Nov. 2017 - 9:11am